

Road Safety Products

BOYLAN GROUP

TritonBarrier



Security for Work Zones

TL-2 Triton Barrier provides positive protection for 70km/h applications at angles of up to 15 degrees.

Featuring an internal steel frame for added strength, it is designed as an easy-to-use, water-filled barrier for work zones. The TL-2's convenient plastic modular design consists of a series of interlocking 2m barrier sections.

Specifications

Length	2m
Height	800mm
Width	500mm
Weight Empty	65kg
Weight with Water	610kg
Water Ballast	550L


Head Office

Unit 8, 42 Peter Brock Drive,
Eastern Creek, NSW, 2766

E info@boylan.net.au | boylan.net.au

Call us 1300 500 055



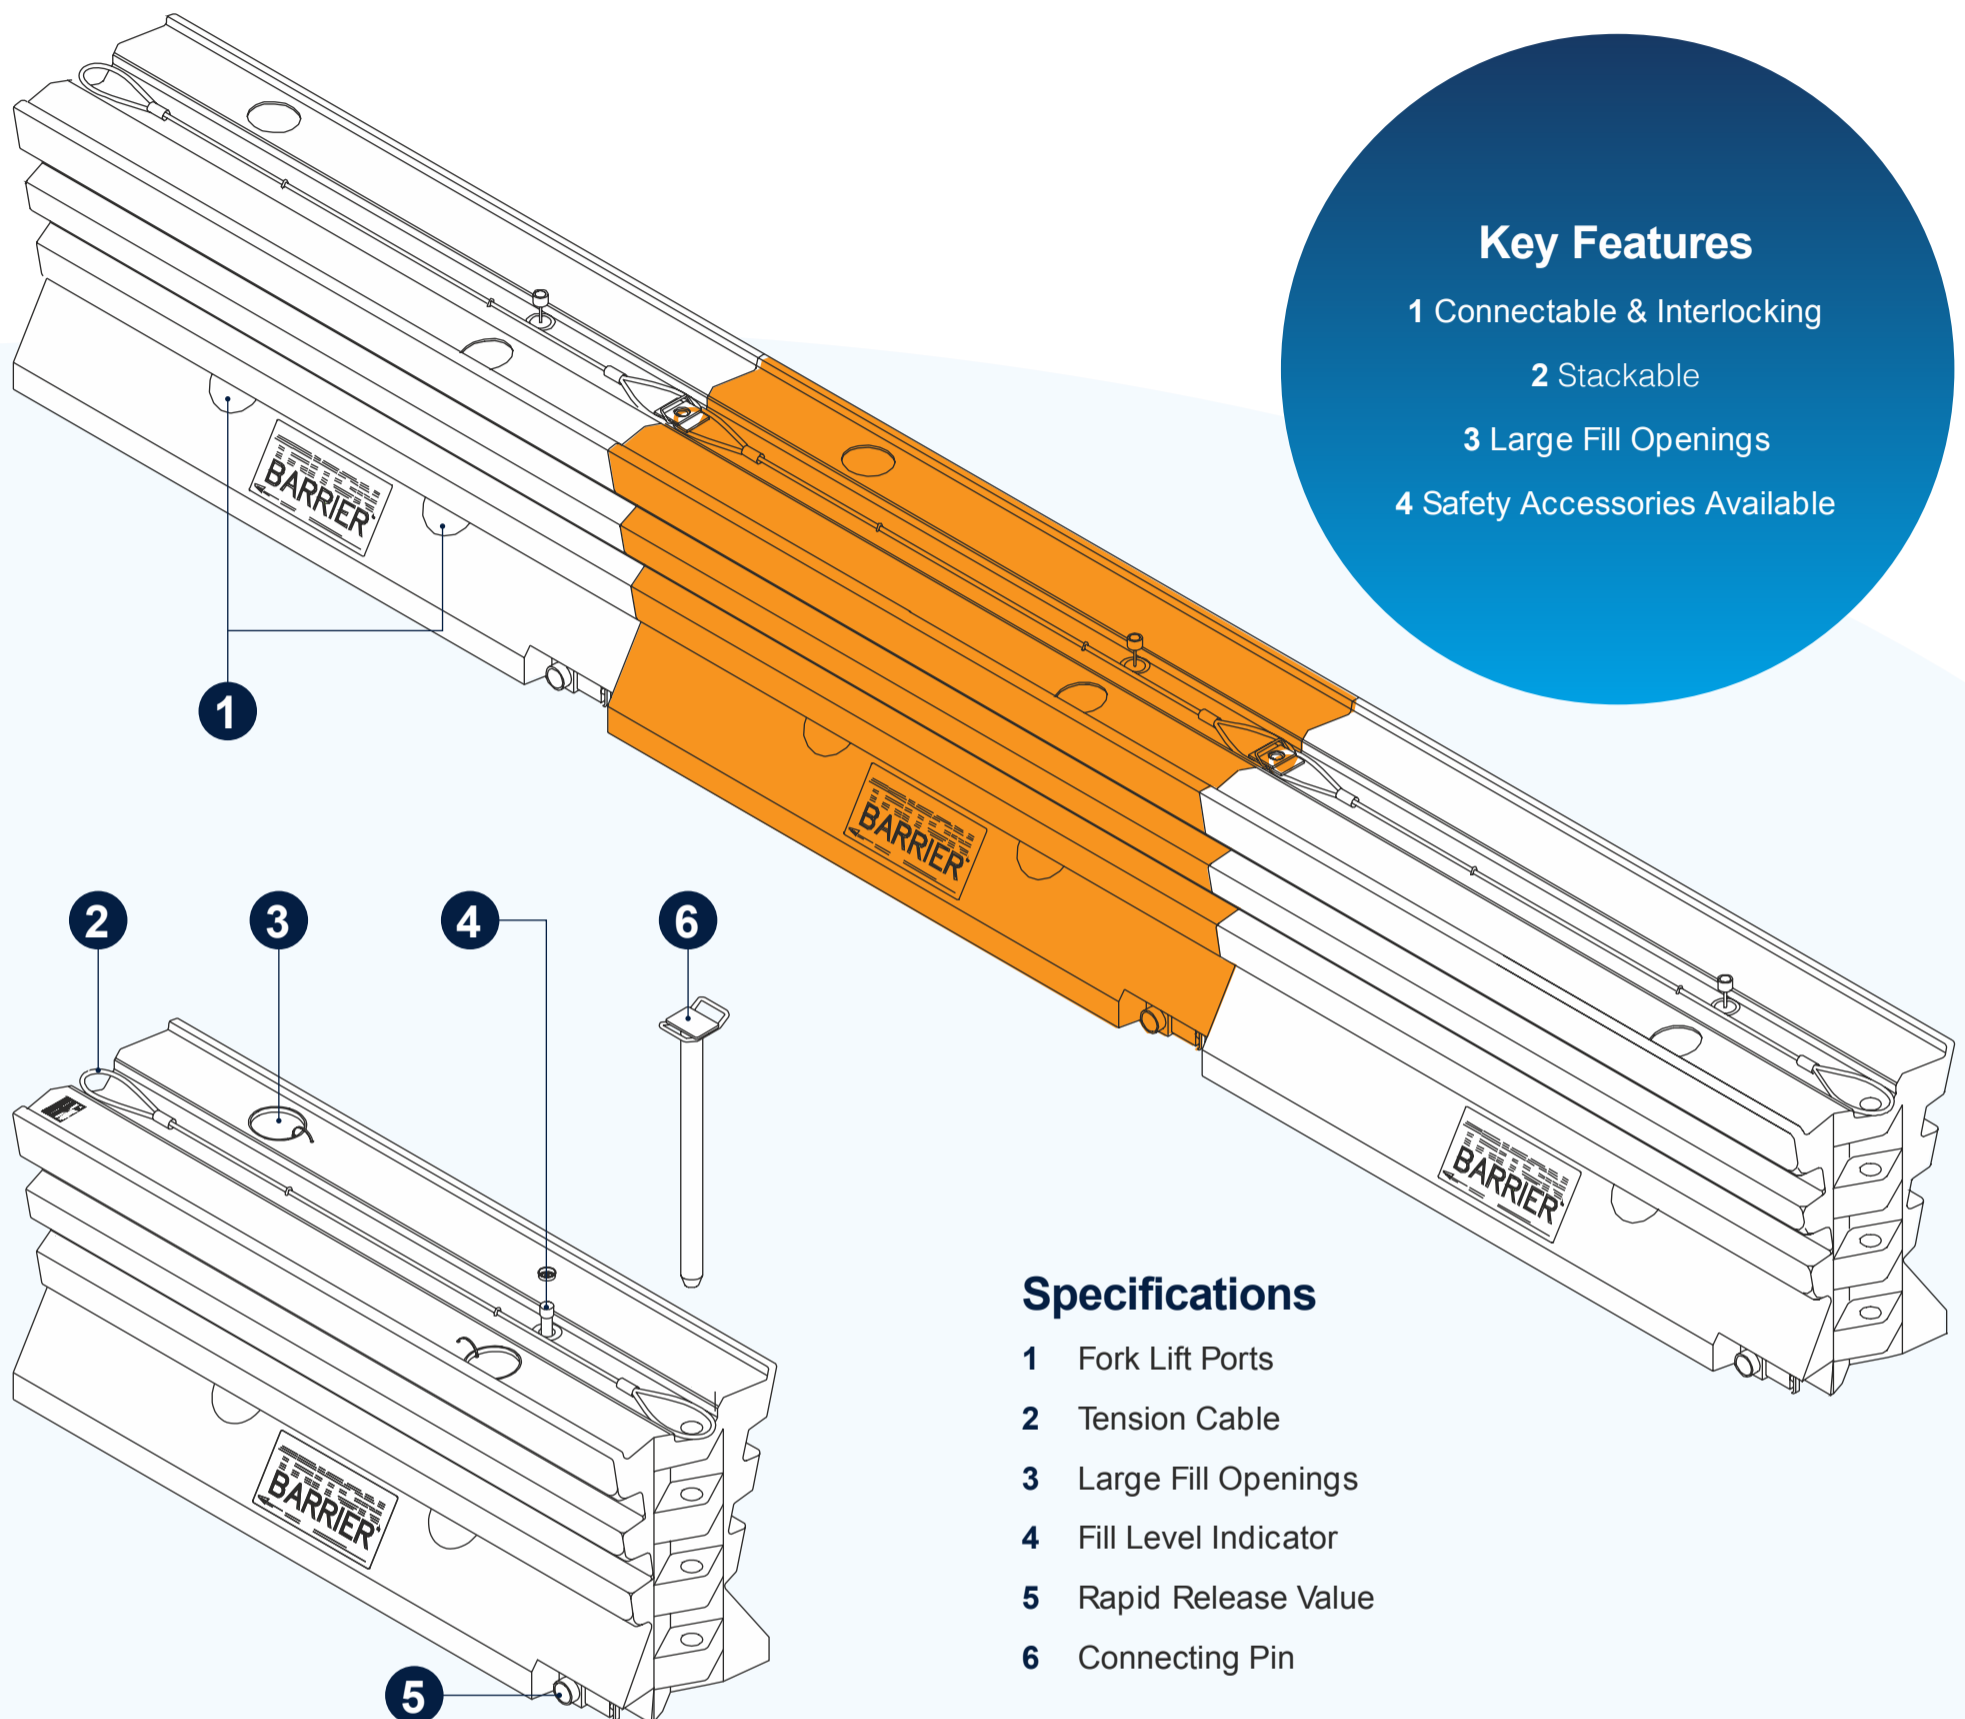

Features & Benefits

- The barrier is highly portable and can be easily deployed in three easy steps, with no cranes required.
- Can be used in varied lengths, for both straight and curved applications.
- Internal frame is built-in – no additional assembly is required.
- Lightweight design (less than 65kg a section) means it can be easily positioned without heavy equipment.
- Fast deployment - a three-person crew can deploy more than 184m of barrier in just one hour.
- High visibility - bright orange and white sections offer added safety for workers.
- Replacement valve and caps available.

Specifications

- 1 Fork Lift Ports
- 2 Tension Cable
- 3 Large Fill Openings
- 4 Fill Level Indicator
- 5 Rapid Release Valve
- 6 Connecting Pin

Applications

- General road maintenance performed by contractors, Local or State Road Authority, port authorities, counties or municipalities
- Lane closures
- Detours or diversions
- Utility operations including electric, water, sewage, gas, telephone and cable companies
- Airport operations
- Channelising
- Building construction blockades
- Crowd control for entertainment and sporting events, conventions, demonstrations, fairs or other gatherings
- Shopping centres